



The standard pallet dismantling machine for all kind of pallets and for every pallet company. Dismantle the pallets completely or just take out broken parts.




Dimensions (LxWxH): 3230 x 1850 x 1400 mm
Maximum transit: 1500 x 180 mm
Weight: 1600 kg
Installed power: 8,6 kW
Electricalconnection: 380 Volt, 32 Amp

PalletSaw Type-W

Since 1993 nearly machines have been sold. Can be used in a repair line and as standalone machine.

- CE certificated by a so called Notified Body (www.SKH.org).
- Speed adjustable table top.
- Pallets can be dismantled with a pushing or pulling method.
- Large wheels with a fabric surface for longer lifetime of the band saw blade and less noise. (picture 1)
- Two connections for saw dust exhaust system.
- Stable and safe galvanized parts like the saw guides. (picture 2)
- Remove broken parts from 50-75 pallets per hour
- 20-40 pallets per hour can be dismantled completely.
- Can be installed without any special facility.

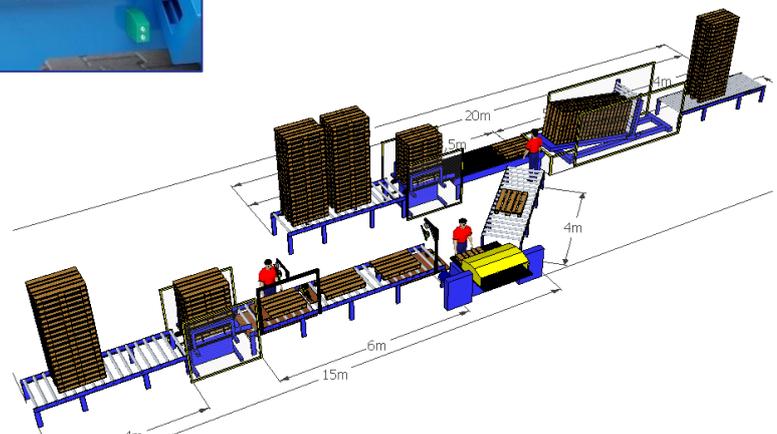



Options PalletSaw Type– W




1. Camera and monitor

A camera is aligned at the band saw. On the screen you are able to see the band saw position. With the foot pedal you can adjust it on the cutting height.



2. Pre- height adjustment

With the help of the three pre-height adjustment buttons, the table will adjust very fast to the required height.

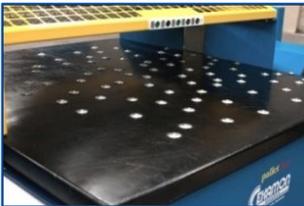

3. Ball bearing rollers

By rolling the pallets over the ball bearings it's easy to move a pallet on the table.



4. Three rolls along the table

Slide the pallets easily on and off the table with the help of three rolls along the table.



5. Opening in the table

Cut off parts will dropped down immediate and good boards can be transported by an optional conveyor directly to a cross cut saw. This clears the tabletop immediately, allowing employees to work faster.



6. Connections for smoke and sawdust exhaust system .

Sawdust can be extracted by an optional exhaust system.

1. The palletSaw will be delivered with standard 1 sawdust connection points.
2. The connection on the yellow protection cap, is optional.



Exhaust system MD 60